

Wind Turbines Surge Protector

SLP30-1260/3(S)

Class II • Type 2



Location of Use: Sub-Distribution Boards
 Network Systems: TN-C
 Mode of Protection: L-PEN
 Surge Ratings: $I_n = 15 \text{ kA}$ (8/20 μs)
 IEC/EN Category: Class II / Type 2
 Protective Elements: High Energy MOV
 Housing: Monoblock Design
 Compliance: IEC 61643-11:2011
 EN 61643-11:2012

Technical Data

SLP30-1260/3

IEC Electrical

Nominal AC Voltage (50/60 Hz)	U_o / U_n	1140 V
Maximum Continuous Operating Voltage (AC)	U_c	1260 V
Nominal Discharge Current (8/20 μs)	I_n	15 kA
Maximum Discharge Current (8/20 μs)	I_{max}	30 kA
Residual Voltage [25kA (8/20 μs)]	U_p	4.0 kV
Residual Voltage [5kA (8/20 μs)]	U_p	3.2 kV
Response Time	t_A	< 25 ns
Max. Backup Fuse		50 A gL / gG
Short-Circuit Current Rating (AC)	I_{SCCR}	25 kA
TOV Withstand 5 s	U_T	1650 Vac withstand
TOV 120 min	U_T	2200 Vac disconnection
Number of Ports		1

Mechanical & Environmental

Operating Temperature Range	T_a	-40 °F to +158 °F [-40 °C to +70 °C]
Permissible Operating Humidity	RH	5%...95%
Atmospheric Pressure and Altitude		80 kPa ... 106 kPa / -500 m ... 2000 m
Terminal Screw Torque	M_{max}	39.9 lbf-in [4.5 Nm]
Conductor Cross Section (max.)		2 AWG (Solid, Stranded) / 4 AWG (Flexible) 35 mm ² (Solid, Stranded) / 25 mm ² (Flexible)
Mounting		35 mm DIN Rail, EN 60715
Degree of Protection		IP20 (built-in)
Housing Material		Thermoplastic: Extinguishing Degree UL 94 V-0
Thermal Protection		Yes
Operating State / Fault Indication		White ok / Red defect
Remote Contacts (RC)		Optional
RC Switching Capacity		AC: 250 V / 0.5 A; DC: 250 V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
RC Conductor Cross Section (max.)		16 AWG (Solid) / 1.5 mm ² (Solid)

Order Information

Ordering Code	1260
SLP30-1260/3	3012230
SLP30-1260/3S	3012231




SLP30-1260/3(S)


Internal Configuration

Legend

- L Line Conductor Terminal
- N Neutral Conductor Terminal
- ⊕ PE/G Conductor Terminal
- S Signalling Contacts Optional

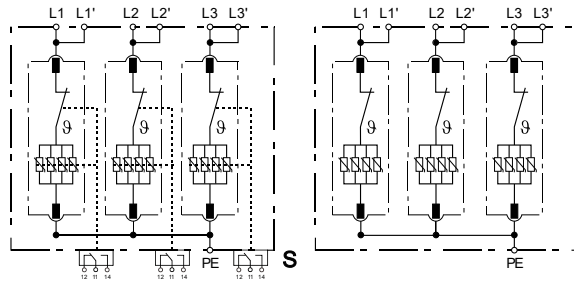

Dimensions & Packaging

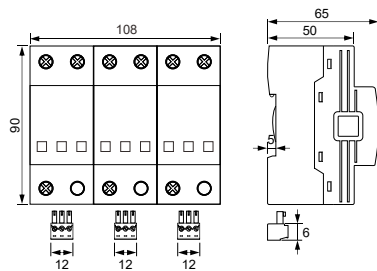

[mm]

Complete Unit

SLP30-1260/3(S)

DIN 43880 Dimension

1 CTN

Packaging Dimensions (H x W x L)

[240 × 220 × 330 mm]

Standard Order Quantity

16 Units

Connection Diagram

TN-C (Three-phase, 3+0)

